

EcoFlow RIVER 3 Plus

Thank you for choosing our product!

Contents

About This Manual

Overview

Appearance

Display Screen

Get Started

Power On/Off

Power Your Appliances

Charge Your Power Station

Management

Download EcoFlow App

Bind Device and Set Up Internet

Control via Phone

Explore More

Expand Battery Capacity

X-Boost: Powering High-Wattage Appliances

Storage and Maintenance

Safety Instructions and Compliances

Disclaimer

Safety Instructions

Regulatory Compliance

Appendix

What's in the Box

Specifications



FAQ



EcoFlow App



After-sales Policy



Community


About This Manual

- This user manual is applicable to the following products: RIVER 3 Plus, RIVER 3 Plus (270).
- The terms "RIVER 3 Plus" and "RIVER 3 Plus (270)" in this manual shall refer to EcoFlow RIVER series products.
- Please note that this manual may be updated without prior notice. If you are reading this manual in PDF format, please note that you can access it online at [EcoFlow Support](#) for a better experience and the latest updates.
- The illustrations in this manual use the US version of the product as examples and references. Please refer to the actual product received.
- The availability of certain accessories and features described in this manual may vary depending on your country or region.


Overview

RIVER 3 Plus and RIVER 3 Plus (270) (hereinafter each referred to as "the power station") are power stations with LiFePO₄ battery. They have multiple outputs and charging options to meet your actual needs.

Appearance

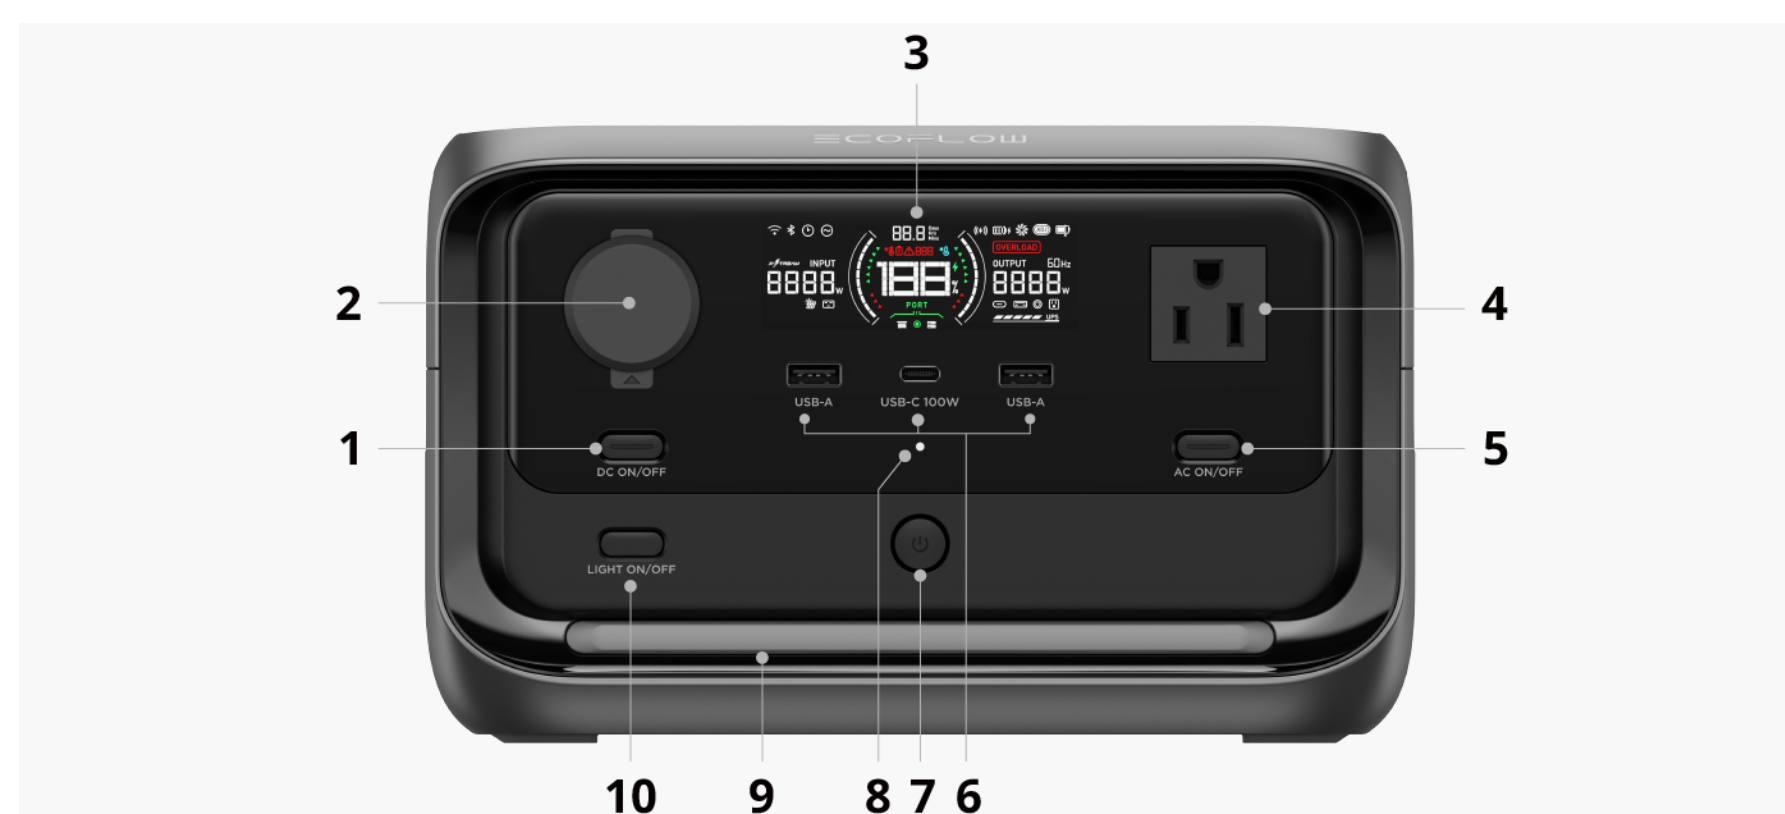

1	DC Output Button	Short press once to turn on/off the DC output port.
2	DC Output Port (Cigarette Lighter)	Powers up on-board appliances with a rated power < 126W.
3	Display Screen	Displays the real-time battery, input power, output power and other operating status.
4	AC Output Socket	Supports X-Boost feature and powers up devices with a rated power < 600W. The types and numbers of AC sockets vary by country and region. Please refer to the actual product.
5	AC Output Button	Short press once to turn on/off the AC output socket.
6	USB Output Ports (USB-C / USB-A)	Supplies power via USB-C and USB-A ports to charge phones, laptops, game consoles, or other devices.
7	Main Power Button	Short press to turn on the power station, long press for 3 seconds to turn off.
8	Main Power Indicator	Breathes white after the power station powers on.
9	Strip Light	Emits a warm yellow glow and offers three modes: low brightness steady, high brightness steady, and high brightness flashing.
10	Light Button	Short press once to turn on/off the strip light or switch mode.

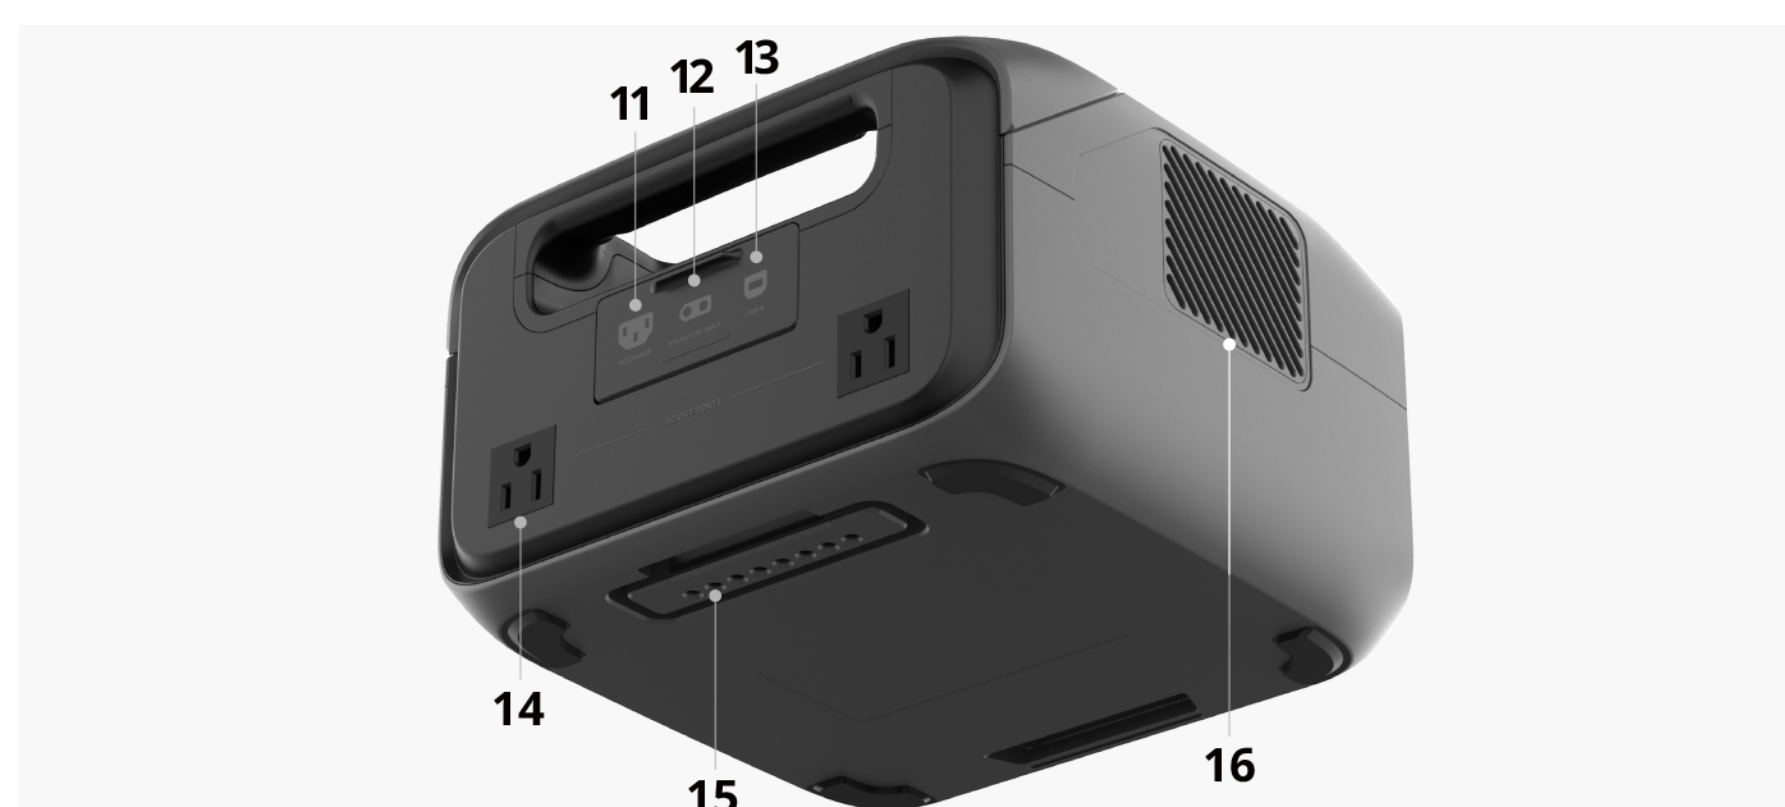

11	AC Input Port	Connects the power station to an AC power source for charging.
12	Solar/Car Input Port	Connects the power station to solar panels or a cigarette lighter socket for charging.
13	USB-B Communication Port	Connects the power station to a computer or a NAS device for communication.
14	AC Output Socket	Supports X-Boost feature and powers up devices with a rated power < 600W. The types and numbers of AC sockets vary by country and region. Please refer to